



VpCI® FORMULATED PRODUCTS FOR PROCESS INDUSTRIES

# CorroLogic® CUI High-Temp Inhibitor



## PRODUCT DESCRIPTION

CorroLogic® CUI High-Temp Inhibitor is a water-based corrosion inhibitor designed to protect against corrosion under insulation (CUI) in high temperature applications up to 1100 °F (600 °C). CorroLogic® CUI High-Temp Inhibitor can extend the life of piping and insulation in refining, petrochemical, and marine environments thus minimizing replacement material and labor costs. The product is non-corrosive and non-flammable, so it can be applied and used safely in widely varying conditions.

A typical and extremely useful application is the protection of insulated steam or hot oil pipelines. Moisture trapped beneath the surface of the insulation can cause corrosion that is difficult to detect. If unnoticed and untreated for too long, this corrosion can result in potentially disastrous leaks with costly damage.

To discourage CUI, CorroLogic® CUI High-Temp Inhibitor should be sprayed on the inside of insulation before it is wrapped around new pipes or other metal surfaces that need to be insulated. CorroLogic® CUI High-Temp Inhibitor may also be applied to existing pipes when corrosion is found during maintenance. If the integrity of the pipe is not compromised, the pipe may be cleaned and wrapped in new insulation treated with CorroLogic® CUI High-Temp Inhibitor to provide future protection.

## FEATURES

- High temperature resistance up to 1100 °F (600 °C)
- Non-flammable
- Protects in wet and dry cycles
- Long lasting

## BENEFITS

- Inhibits CUI on pipes and other insulated metal surfaces
- Reduces frequency of maintenance and repair related to CUI
- Increases overall plant safety by reducing dangerous corrosion-related failures

## APPLICATION

CorroLogic® CUI High-Temp Inhibitor should be applied to the insulation prior to wrapping or coating pipes. Mix thoroughly prior to use. Product should be spread at a rate of 150 – 200 ft<sup>2</sup> per gallon (3.68-4.9 m<sup>2</sup>/L) on insulation. For best results, pipes or metal surfaces treated with CorroLogic® CUI High-Temp Inhibitor should be protected as soon as possible with either an insulation blanket or similar pipe wrapping. CorroLogic® CUI High-Temp Inhibitor is light and powder-like once dried.

Possible applications include insulated piping or exhaust manifolds in

- Power Plants
- Refineries
- Ships
- Offshore Rigs
- Other Industrial Facilities

## METALS PROTECTED

- Carbon Steel
- Cast Iron


## TYPICAL PROPERTIES

Appearance	White thixotropic liquid
Dry Time	20 minutes
Non-Volatile Content	18-22%
pH	8.2-8.7 (1% aqueous)
Density	8.7-9.6 lb/gal (1.04-1.15 kg/L)


## STORAGE AND PACKAGING

CorroLogic® CUI High-Temp Inhibitor is available in 5 gallon (19 liter) plastic pails, 55 gallon (208 liter) metal drums, liquid totes, and bulk. Do not allow product to freeze. Shelf life: 24 months at 75 °F (24 °C).

## TEST RESULTS

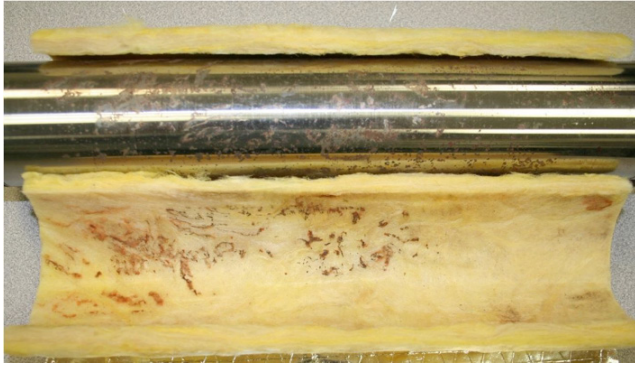


Unprotected pipe, after 240 hours of testing in high temperature conditions with regular chloride injection.

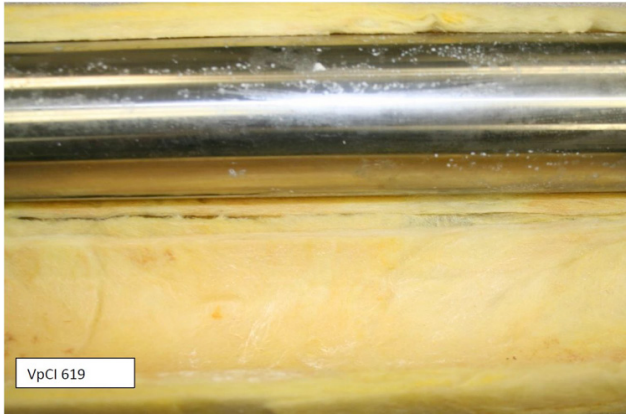

Pipe protected by CorroLogic® CUI High-Temp Inhibitor after 240 hours of testing in high temperature conditions with regular chloride injection.

## Corrosion Behavior of API 5L X65 Mild Steel Pipe at 220 °F (104 °C)

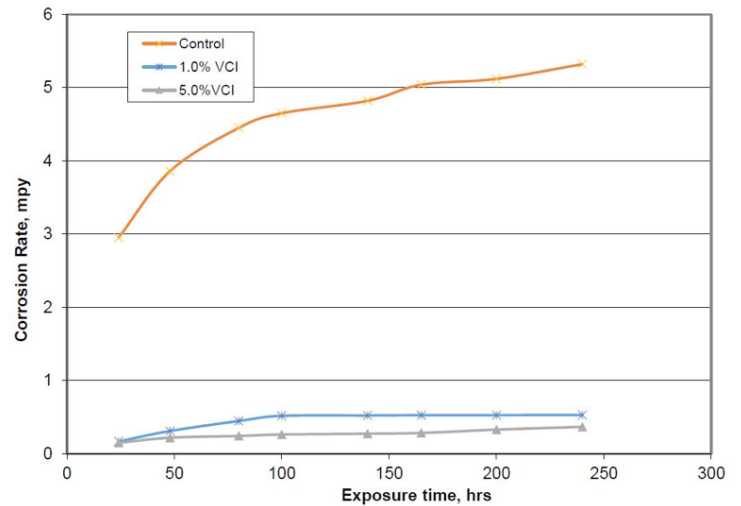

Corrosion behavior of steel pipes in boiling chloride water solution (200 ppm). Corrosion rate (mpy) of untreated control (orange) versus samples treated with 1% CorroLogic® CUI High-Temp Inhibitor (blue) and 5% CorroLogic® CUI High-Temp Inhibitor (gray).

Test results can be found in "Protection Effectiveness of Vapor Corrosion Inhibitor CUI High-Temp Inhibitor for Corrosion Under Insulation at Elevated Temperatures," prepared for CORTEC® Corporation by Dr. Behzad Bavarian, California State University, Northridge, USA 91330, February 2018.

<https://www.cortecvci.com/Publications/Papers/CUI-report-on-VCI-619.pdf>

**FOR INDUSTRIAL USE ONLY**  
**KEEP OUT OF REACH OF CHILDREN**  
**KEEP CONTAINER TIGHTLY CLOSED**  
**NOT FOR INTERNAL CONSUMPTION**  
**CONSULT SAFETY DATA SHEET FOR MORE INFORMATION**

### LIMITED WARRANTY

All statements, technical information and recommendations contained herein are based on tests Cortec® Corporation believes to be reliable, but the accuracy or completeness thereof is not guaranteed.

Cortec® Corporation warrants Cortec® products will be free from defects when shipped to customer. Cortec® Corporation's obligation under this warranty shall be limited to replacement of product that proves to be defective. To obtain replacement product under this warranty, the customer must notify Cortec® Corporation of the claimed defect within six months after shipment of product to customer. All freight charges for replacement products shall be paid by customer.

Cortec® Corporation shall have no liability for any injury, loss or damage arising out of the use of or the inability to use the products.

BEFORE USING, USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR ITS INTENDED USE,

AND USER ASSUMES ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH. No representation or recommendation not contained herein shall have any force or effect unless in a written document signed by an officer of Cortec® Corporation.

THE FOREGOING WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES, EXPRESS, IMPLIED OR STATUTORY, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTY OF MERCHANTABILITY OR OF FITNESS FOR A PARTICULAR PURPOSE. IN NO CASE SHALL CORTEC® CORPORATION BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES.



**CORTEC**  
CORPORATION

Environmentally Safe VpCI®/MCI® Technologies

4119 White Bear Parkway, St. Paul, MN 55110 USA  
Phone (651) 429-1100, Fax (651) 429-1122  
Toll Free (800) 4-CORTEC, E-mail [info@cortecvci.com](mailto:info@cortecvci.com)  
[www.cortecvci.com](http://www.cortecvci.com)

Printed on recycled paper  100% post consumer

Revised: 04/09/19. Supersedes: 08/01/18. ©Cortec Corporation 2002-2019 of Cortec Corporation.  
All Rights Reserved. Copying of these materials in any form without the written authorization of Cortec Corporation is strictly prohibited. 2019, ©Cortec Corp. ISO accreditation applies to Cortec's processes only.

Distributed by: