



VpCI® FORMULATED PRODUCTS FOR PROCESS INDUSTRIES

CorroLogic® CUI Inhibitor



PRODUCT DESCRIPTION

CorroLogic® CUI Inhibitor is a solvent-based, injectable corrosion inhibitor for protection against corrosion under insulation (CUI). CorroLogic® CUI Inhibitor combats corrosion caused by moisture and other corrosive media that enter insulation after water barrier wraps or jackets are compromised or when condensation builds up beneath the insulation. Moisture trapped between insulation and metal surfaces, such as piping, encourages corrosion that may go undetected for long periods of time. This can cause serious maintenance and repair costs and potentially dangerous leaks.

Applying CorroLogic® CUI Inhibitor provides long-lasting benefits such as decreased maintenance costs, reduced downtime for repair and replacement, and an overall increase in safety by preventing catastrophic failures related to corrosion. Vapor phase Corrosion Inhibitors in the product enable CorroLogic® CUI Inhibitor to be injected into existing insulation and allowed to migrate through the insulation to protect metal surfaces below.

FEATURES

- Vapor phase Corrosion Inhibitors migrate throughout insulation to protect insulated metal surfaces from corrosion
- Protects in wet and dry cycles
- Long lasting

BENEFITS

- Inhibits CUI on pipes and other insulated metal surfaces
- Reduces frequency of maintenance and repair related to CUI
- Increases overall plant safety by reducing dangerous corrosion-related failures

APPLICATION

CorroLogic® CUI Inhibitor should be injected beneath the existing insulation at a rate of 0.3 fluid ounces per cubic foot (0.3 liters per cubic meter) of insulation volume. Injection points should be spaced every 10-20 feet (3-6 meters) to allow proper dispersion and application of the product. Do not use on pipes that will exceed 338 °F (170 °C).

METALS PROTECTED

- Carbon Steel
- Copper
- Brass

TYPICAL PROPERTIES

Visual	Clear, pale yellow liquid
Non-Volatile Content	8%
Density	6.7 lb/gal (0.79 kg/L)

STORAGE AND PACKAGING

CorroLogic® CUI Inhibitor is available in 5 gallon (19 liter) plastic pails, 55 gallon (208 liter) metal drums, liquid totes, and bulk.


To ensure best product performance, store in original packaging, indoors, and out of direct sunlight at 40-100 °F (4-38 °C).

Shelf life: 2 years



TEST RESULTS

Corrosion Rate of CUI samples using ER Flush 10 Probes

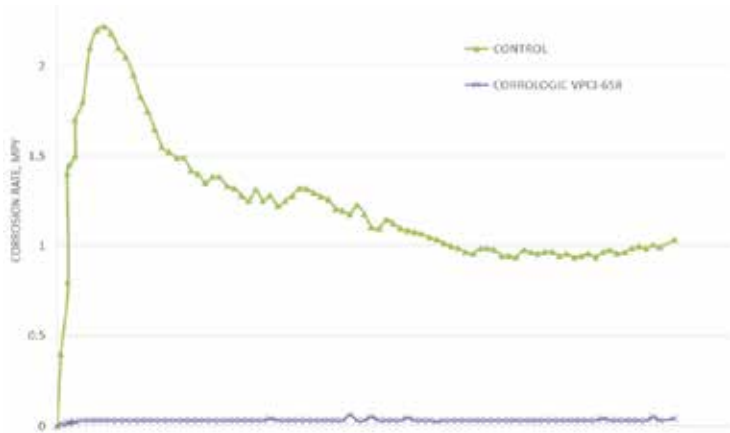

ER (electrical resistance) probe corrosion readings over 4000 hours of testing.



Pipe surfaces after 210 days of corrosion testing. CorroLogic® CUI Inhibitor was applied to the bottom pipe.

Test results taken from "Protection of Corrosion under Insulation using Vapor Phase Corrosion Inhibitors, Corrologic CUI Inhibitor," prepared for CORTEC® Corporation by Dr. Behzad Bavarian, Yashar Ikder, Babak Samimi, and Lisa Reiner; Dept. of Manufacturing Systems Engineering & Management, College of Engineering and Computer Science, California State University, Northridge, USA 91330; April 2015.

<https://www.cortecvci.com/Publications/Papers/Corrologic-VpCI-658-inhibitor-effects-on-CUI-final-report.pdf>

FOR INDUSTRIAL USE ONLY
KEEP OUT OF REACH OF CHILDREN
KEEP CONTAINER TIGHTLY CLOSED
NOT FOR INTERNAL CONSUMPTION
CONSULT SAFETY DATA SHEET FOR MORE INFORMATION

LIMITED WARRANTY

All statements, technical information and recommendations contained herein are based on tests Cortec® Corporation believes to be reliable, but the accuracy or completeness thereof is not guaranteed.

Cortec® Corporation warrants Cortec® products will be free from defects when shipped to customer. Cortec® Corporation's obligation under this warranty shall be limited to replacement of product that proves to be defective. To obtain replacement product under this warranty, the customer must notify Cortec® Corporation of the claimed defect within six months after shipment of product to customer. All freight charges for replacement products shall be paid by customer.

Cortec® Corporation shall have no liability for any injury, loss or damage arising out of the use of or the inability to use the products.
BEFORE USING, USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR ITS INTENDED USE,

AND USER ASSUMES ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH. No representation or recommendation not contained herein shall have any force or effect unless in a written document signed by an officer of Cortec® Corporation.

THE FOREGOING WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES, EXPRESS, IMPLIED OR STATUTORY, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTY OF MERCHANTABILITY OR OF FITNESS FOR A PARTICULAR PURPOSE. IN NO CASE SHALL CORTEC® CORPORATION BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES.



4119 White Bear Parkway, St. Paul, MN 55110 USA
Phone (651) 429-1100, Fax (651) 429-1122
Toll Free (800) 4-CORTEC, E-mail info@cortecvci.com
www.cortecvci.com

Printed on recycled paper  100% post consumer

Revised: 09/17/19. Supersedes: 04/09/19. ©Cortec® Corporation 2002-2019 of Cortec® Corporation. All Rights Reserved. Copying and/or manipulation of these materials in any form without the written authorization of Cortec® Corporation is strictly prohibited. 2019, ©Cortec® Corp. ISO accreditation applies to Cortec's processes only.

Distributed by: